

# Tamar seal 620-BL

## Gas application


### Features

**MTZ 620-BL** provides the best solution for sealing **blowers**. The MTZ620BL is easy to maintain, and provides 3-4 weeks notice before maintenance.

- Can be serviced while the equipment is running, no downtime
- Simple to install and maintain
- Free of fragile faces
- Average life before servicing - 3 years

### Parameters

- Max. sealing pressure \_\_\_\_\_ up to 0.5 bar (7 psi)
- Max. shaft speed \_\_\_\_\_ 3 m/s (10 f/s)
- PH \_\_\_\_\_ 0-14
- Max Temperature \_\_\_\_\_ 200°C (392 °F)
- Max radial runout \_\_\_\_\_ 0.5mm (0.02")

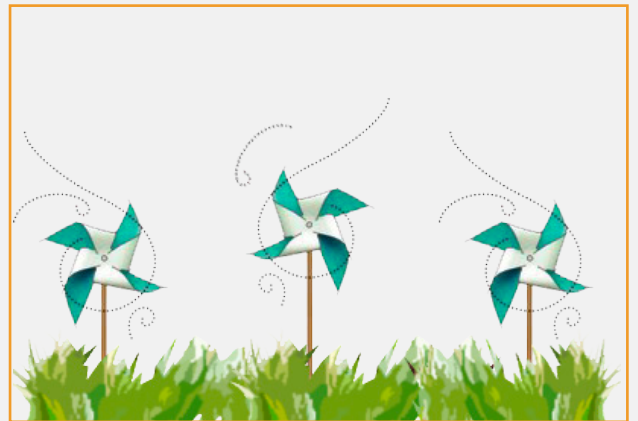

**3 years warranty** | Blower  
Power plant

